

# INSTALLATION INSTRUCTIONS

## Quick Top

Number plate holder

**Helmut Seitz** GMBH  
Kfz. - Produkte

Joseph-Baur-Str. 4  
DE-86316 Friedberg  
☎ +49 (0)821/54 38 62 - 0  
☎ +49 (0)821/54 38 62 - 99

Internet:  
www.helmut-seitz.de  
E-Mail:  
info@helmut-seitz.de

### FOR WORKSHOP USE ONLY

Attach the holder to the vehicle with ring washers (Ø 20 mm diameter) using the existing drill holes.

#### Illustration 1 a and 1 b - Insert the sign

Insert the sign (in direction of arrow 1) from the bottom up under the top lugs of the holder-floor.

Then push the bottom of the sign edge into the left and right holding clamp (in direction of arrow 2).  
The sign is held now.

#### Illustration 2 - Closing

#### Attention!

Push the sides of the manually pre-curved advertising bar into the left and right holding fixture (in direction of arrows) at the bottom of the holder-floor. Afterwards press the bar from the left and right side to the middle towards the holder-floor, **so that it locks with five hearable "click" sounds.**

The installation of the sign is completed.

#### Illustration 3 a and 3 b - Deinstallation

Insert the opening tool or a screwdriver at the centred mark on the bar (see arrow 1), between the sign and the advertising bar, until the bar is unlocked and spread open. Afterwards take the bar in the middle and pull it carefully out of the holder-floor (in direction of arrow 2).

Take out the sign from the left and right holding clamp.  
The sign is removed.

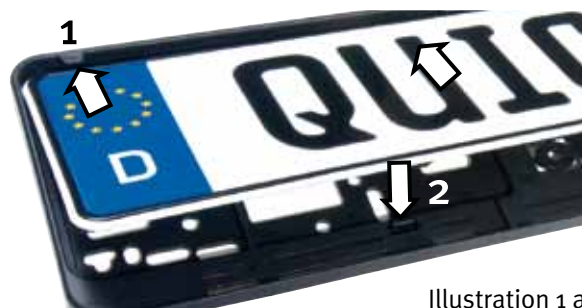


Illustration 1 a



Illustration 1 b



Illustration 2

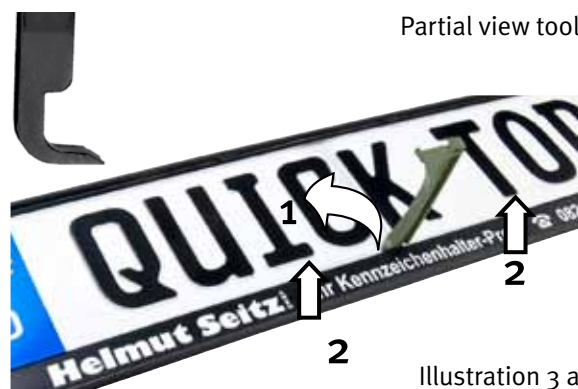


Illustration 3 a



Illustration 3 b