

INSTALLATION INSTRUCTIONS

Klipp Top 4

Number plate holder

Helmut Seitz GMBH
Kfz.-Produkte

Joseph-Baur-Str. 4
DE-86316 Friedberg
☎ +49 (0)821/54 38 62-0
☎ +49 (0)821/54 38 62-99

Internet:
www.helmut-seitz.de
E-Mail:
info@helmut-seitz.de

FOR WORKSHOP USE ONLY

Attach the holder to the vehicle with ring washers (Ø 20 mm diameter) using the existing drill holes.



Partial view tool

Illustration 1 - Opening

Insert the tool (supplied) from the inner side under the side bar as shown (arrow 1). Tilt the tool towards to the centre in order to lever up the side bars.

Important: Thereafter turn the tool and tilt the advertising bar down according to arrow 2.

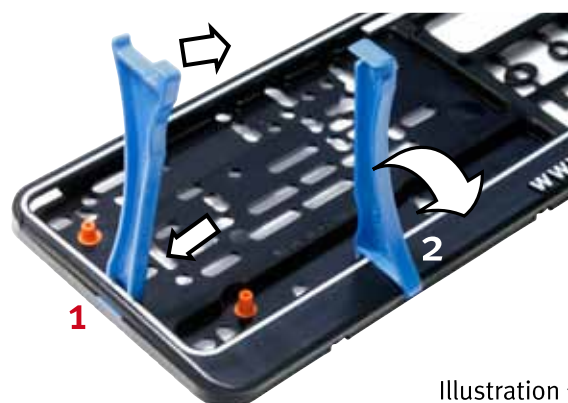


Illustration 1

Illustration 2 - Insert the sign

Insert the sign from the bottom up under the top edge of the holder-floor (see arrow). Then push the sign into the holding clamps left and right.



Illustration 2

Illustration 3 - Closing

Attention!

Close the advertising bar and **press the side bars from the top to the bottom until the raster balls on the outer ends close with a hearable “click” sound. Close the raster balls in the middle of the advertising bar, too (see arrows).**



Illustration 3